



WIRING DIAGRAM

Caution: Ensure that the wires do not touch any hot surfaces and are away from sharp edges.

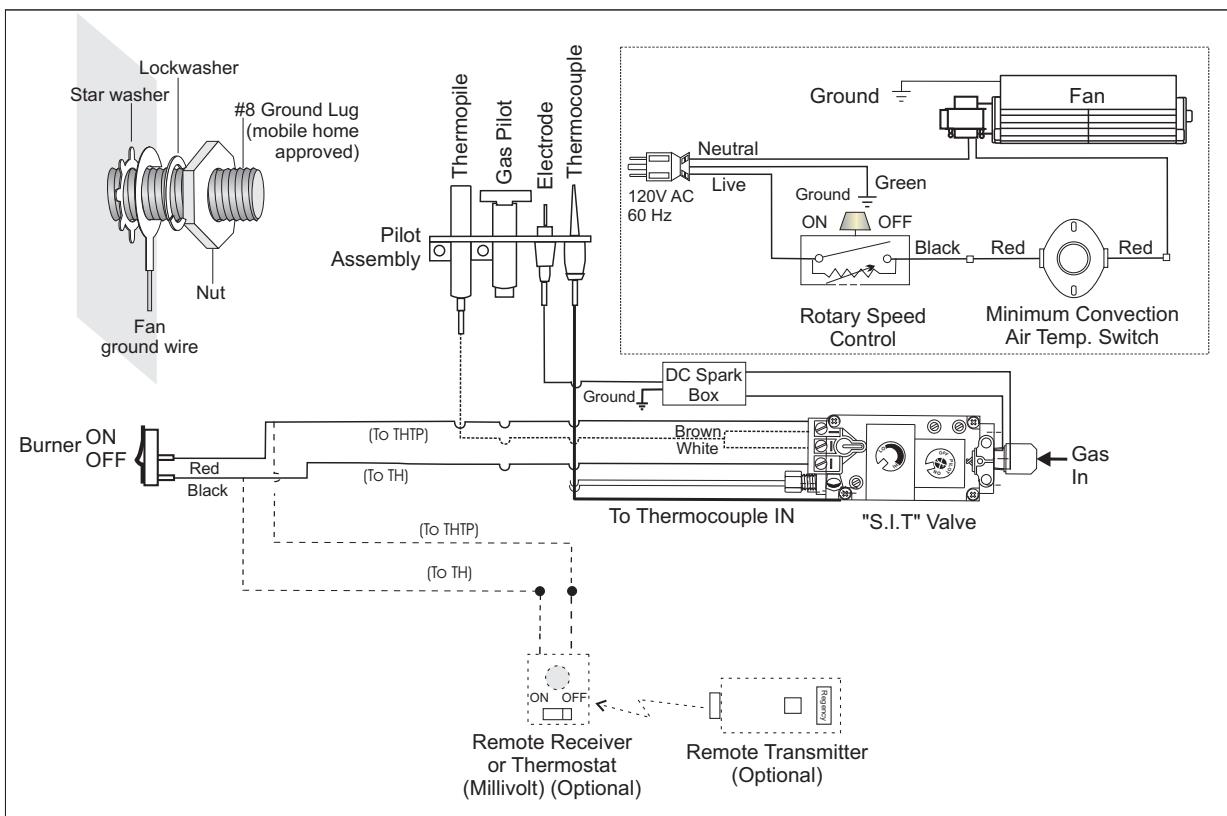

CAUTION: Label all wires prior to disconnection when servicing controls. Wiring errors can cause improper and dangerous operation.

Openings for electrical connections

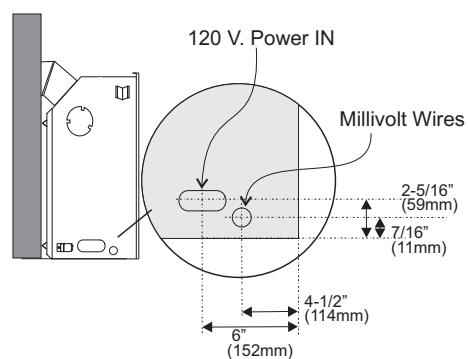

GT REMOTE WIRING DIAGRAM

IMPORTANT INSTALLATION NOTE:

The SIT Proflame GT REMOTE Receiver must be placed inside the supplied (Low Voltage) junction type wall box and installed into the wall only.



DO NOT INSTALL WITHIN THE CONFINES OF THE FIREPLACE.

Wall Mounting

1. Add two male spade connectors to the end of the 10 foot 2-wire harness (Black & Red) installed with P33S.
2. Install the J-Box to the framing, at desired location within 10ft from fireplace.
3. Feed the 2ft wire harness through the opening at back of J-Box, Connect the black & red wires to the two wires from the (2 foot) SIT Proflame GTMF wire harness, (TH green) & (TP/TH White) other wires will not be used.
4. Connect the wiring harness to the back of the receiver.
5. Install the Receiver in the Low Voltage Junction box, supplied with P33S.
6. Insert the 4 AA type batteries in the battery compartment with the correct polarity.
7. Place the slider into the cover plate.
8. Put the Receiver switch in the "OFF" position, to allow correct lineup for slider switch.
9. Make sure the Receiver and cover plate words "ON" and "UP" are on the same side.
10. Align the slider with the switch on the Receiver and couple the switch into the slider.
11. Align the screw holes.
12. Using the two (2) screws provided secure the cover plate to the Receiver.



Low Voltage Junction Box

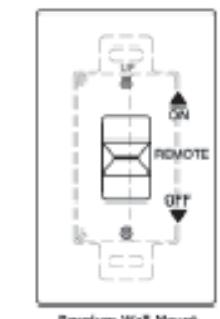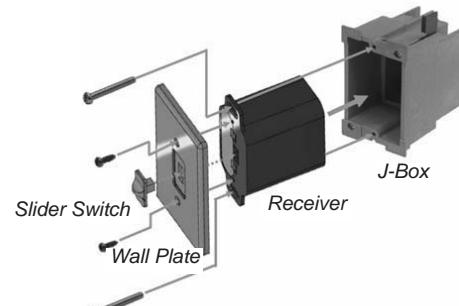

Receiver 12 Pin Connector
for mV GT System
TH/TP/TH Connectors Only

REFER TO CODING INSTRUCTIONS IN THIS MANUAL

