

OPTIONAL WALL THERMOSTAT INSTALLATION

A wall thermostat may be installed if desired. Use chart below to determine the maximum wire length:


Thermostat Wire Table

Recommended max lead length (two wire) when using wall thermostat (CP-2 system) or remote control	
Wire size	Max. length
14 GA.	50 Ft.
16 GA.	32 Ft.
18 GA.	20 Ft.
20 GA.	12 Ft.
22 GA.	9 Ft.

Note: Preferable if the thermostat is installed on an interior wall.

Regency offers a programmable thermostat but any CSA, ULC or UL approved millivolt thermostat, 250-750 millivolt rated non-anticipator type thermostat may be used.

WIRING DIAGRAM - U43

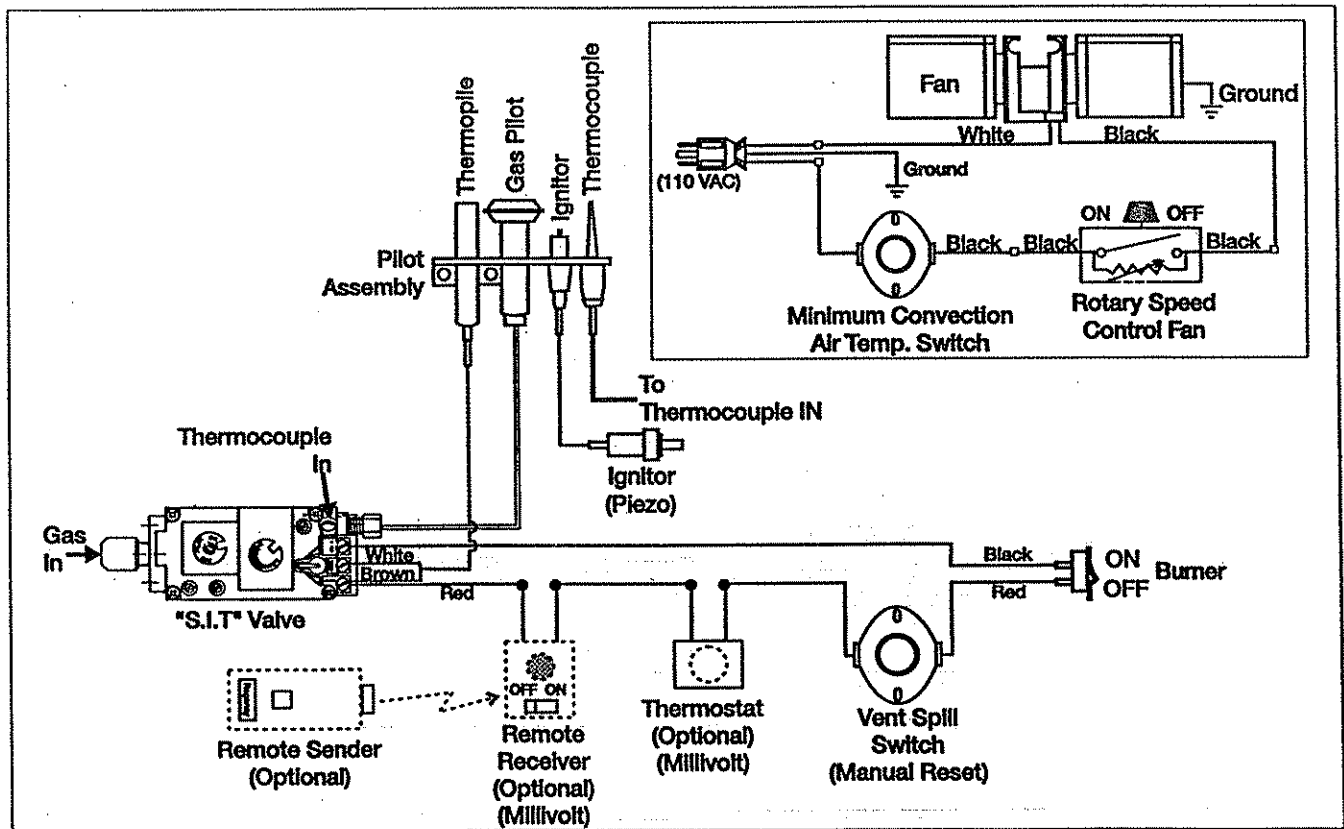

INSTALLATION

WIRING DIAGRAM - U28

