


**Before you begin** — This unit is supplied with six (6) ceramic fiber logs. Do not handle these logs with your bare hands. **Always wear gloves to prevent skin irritation from ceramic fibers.** After handling the logs, wash your hands gently with soap and water to remove any traces of fibers.

**CAUTION**  
**DO NOT** sprinkle volcanic rock on the logs or around the pilot or the main burner. This may cause sooting. Only place volcanic rock on the floor of the fireplace.  
During initial operation of the new heater, burning logs will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.



**WARNING**  
The positioning of the logs is critical to the safe and clean operation of this heater. Sooting and other problems may result if the logs are not properly and firmly positioned in the appliance. Never add additional logs or embellishments such as pine cones, vermiculite or rock wool to the heater. Only use the logs and TPB-RW (rock wool) supplied with the unit.  
Failure to position the parts in accordance with diagrams below or to use only parts specifically approved for this heater may result in property damage or personal injury.



**INSTALL CHARRED TIMBER LOGS ON BURNER**

1. Place rear log (#1) on two pins located on the back of the grate. *Figure 19*

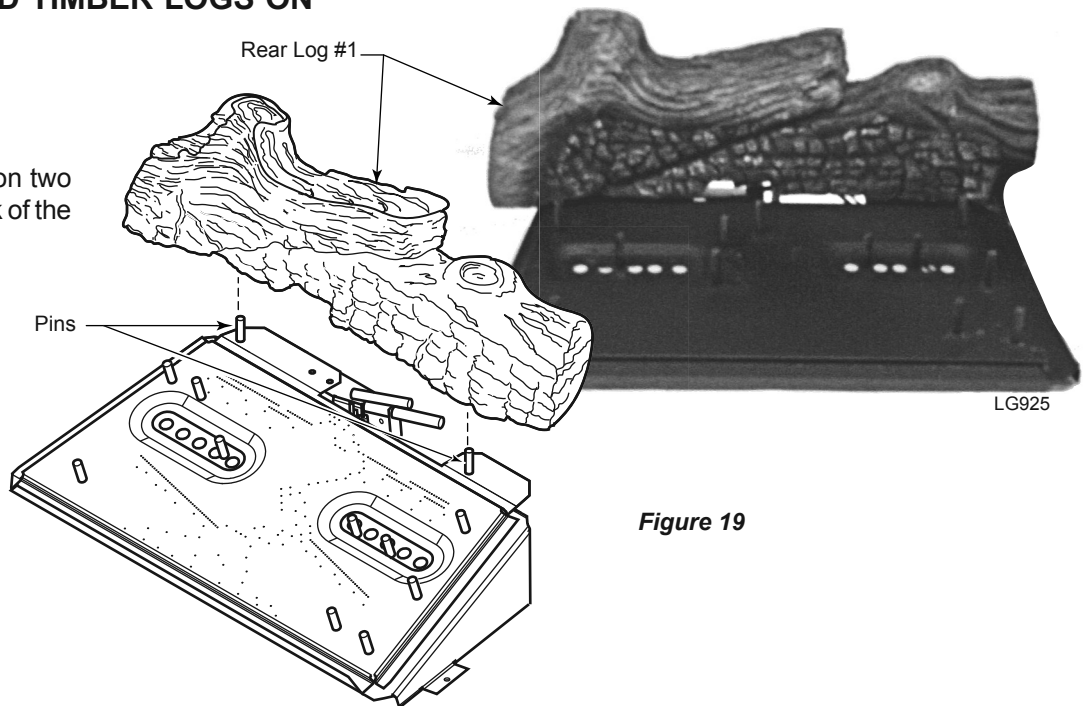

*Figure 19*

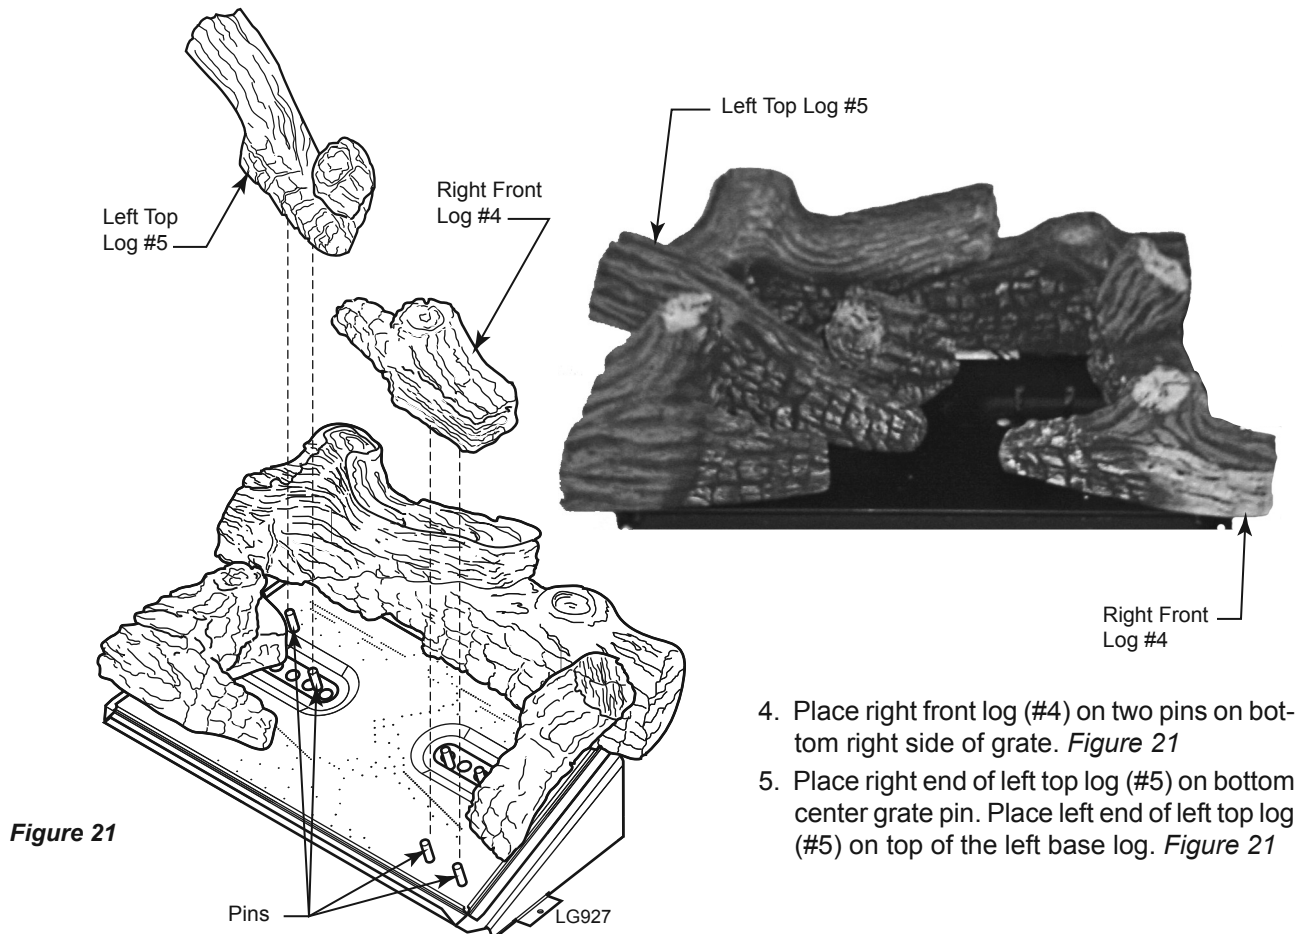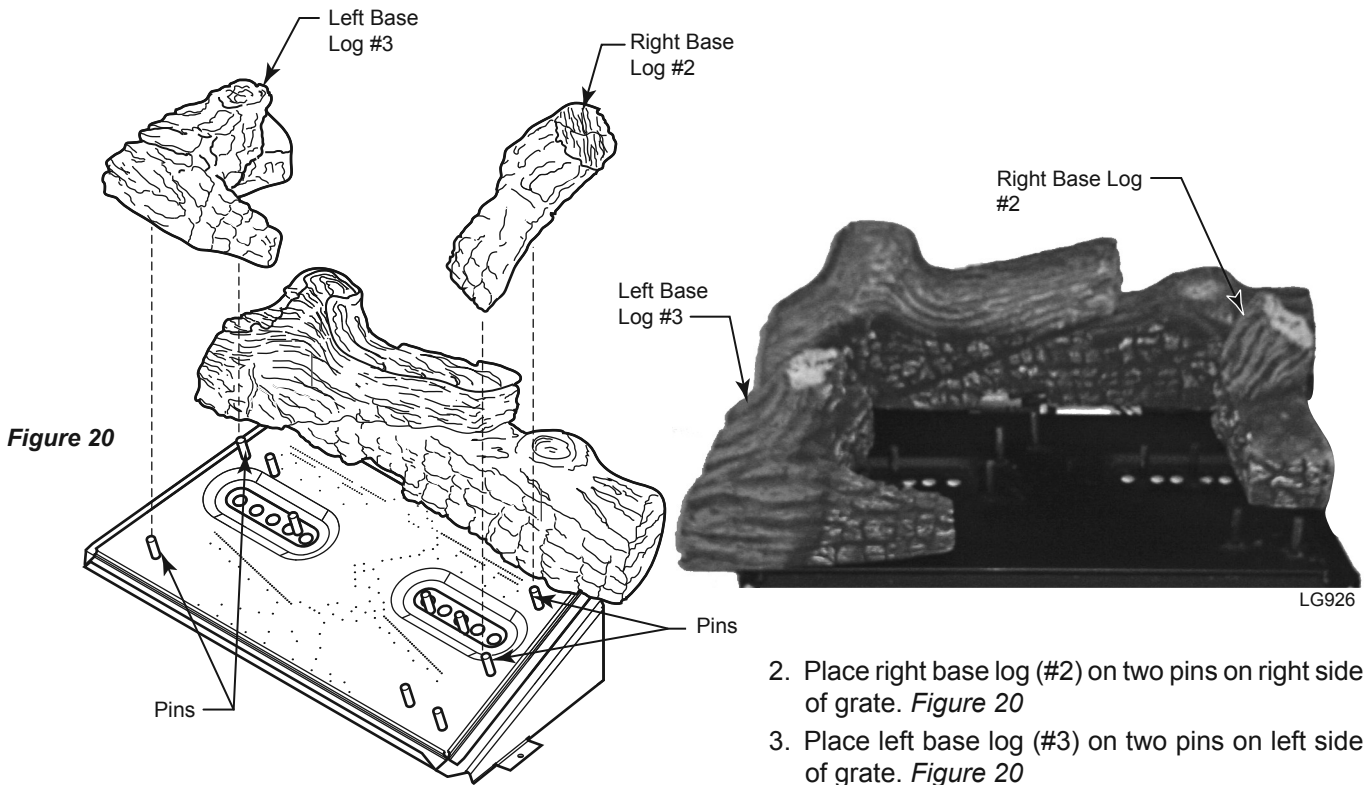

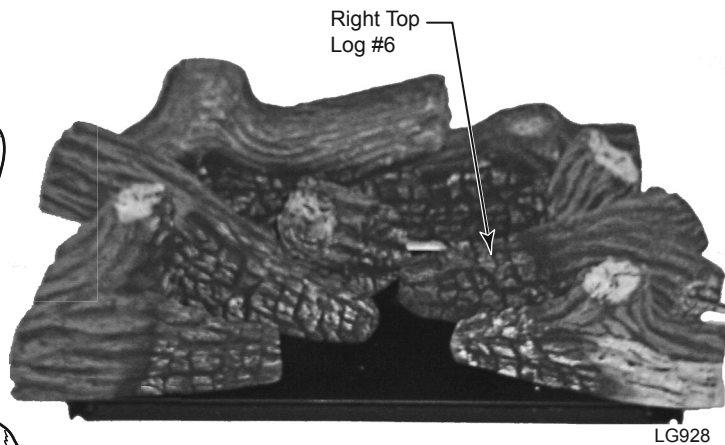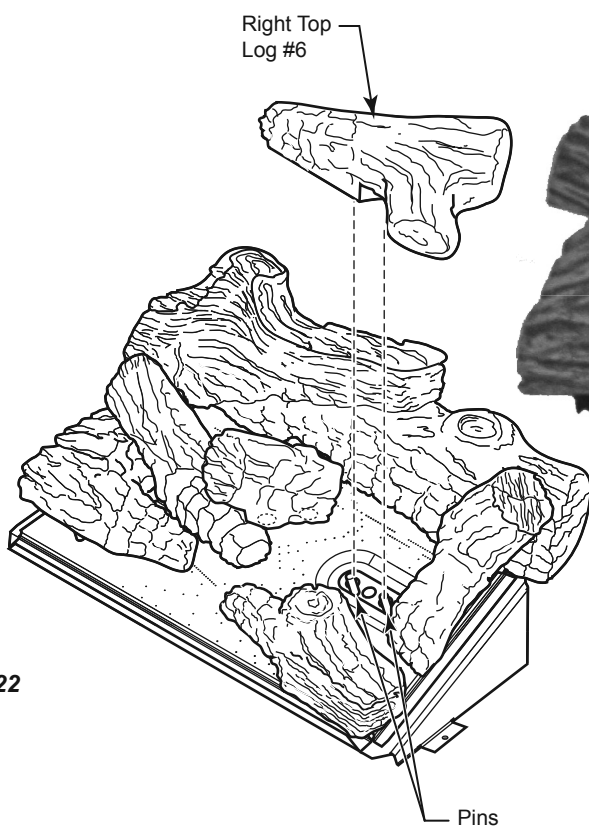

LG928

6. Place right top log (#6) on two pins to the left of right base log. *Figure 22*

**Figure 22**


**WARNING**

- Use only TPB rock wool provided with log set.
- Do not add additional rock wool.

**PLACING ROCK WOOL**

After installing logs, place TPB-RW (Rock Wool) in dime-size pieces evenly across the burner surface in between the logs. Do not add additional rock wool. Refer to *Figure 23* for the approximate area to place rock wool.

Wash hands after placing rock wool. Itching may occur.

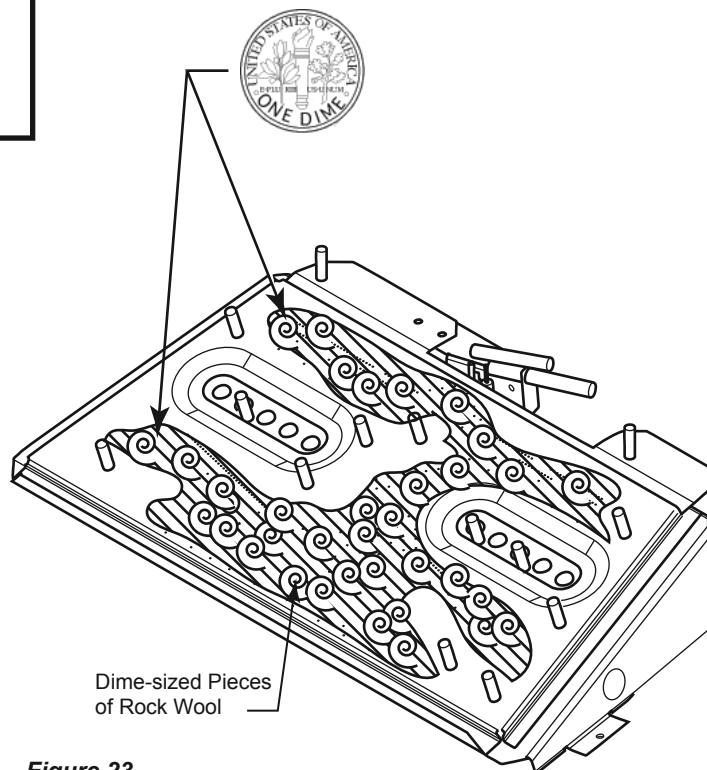

**Figure 23 - Place Rock Wool**

LG929