

**Before you begin** — This unit is supplied with eight ceramic fiber logs. Do not handle these logs with your bare hands. **Always wear gloves to prevent skin irritation from ceramic fibers.** After handling the logs, wash your hands gently with soap and water to remove any traces of fibers.

**WARNING**


The positioning of the logs is critical to the safe and clean operation of this heater. Excessive sooting and other problems may result if the logs are not properly and firmly positioned in the appliance. Never add additional logs or embellishments such as pine cones or vermiculite to the heater. Only use the logs supplied with the unit.

Failure to position the parts in accordance with diagrams below or to use only parts specifically approved for this heater may result in property damage or personal injury.

### INSTALL LOGS AND ROCK WOOL (EMBER MATERIAL) IN FIREBOX

1. Carefully remove logs from wrapping.
2. Remove glass frame. Refer to *Glass Frame Removal*, Page 27


3. Place bottom right log (#3) on two pins against right side of firebox. *Figure 38*

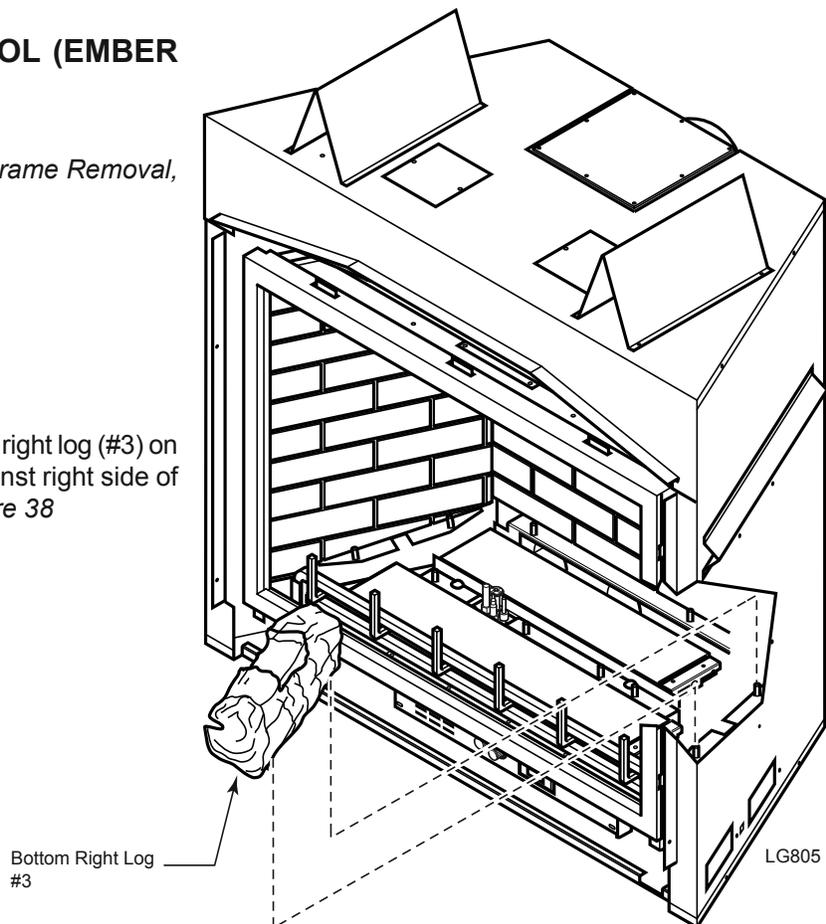

**Figure 38**


4. Place rear log (#1) on two pins against back side of firebox. *Figure 39*

Rear Log #1

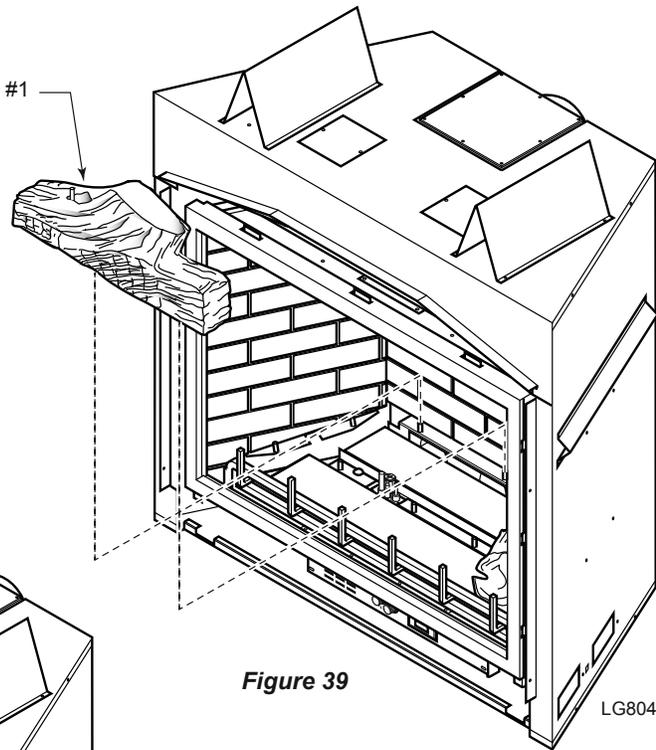

**Figure 39**

Bottom Left Log #2

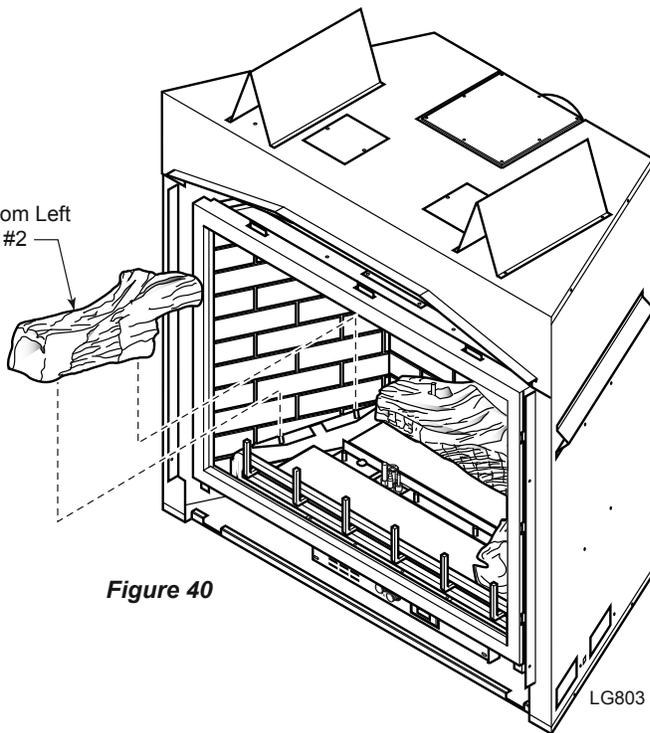


**Figure 40**

5. Place bottom left log (#2) on two pins against left side of firebox. *Figure 40*



6. Place left mid log (#6) on two left pins on burner assembly. *Figure 41*

Left Mid Log #6

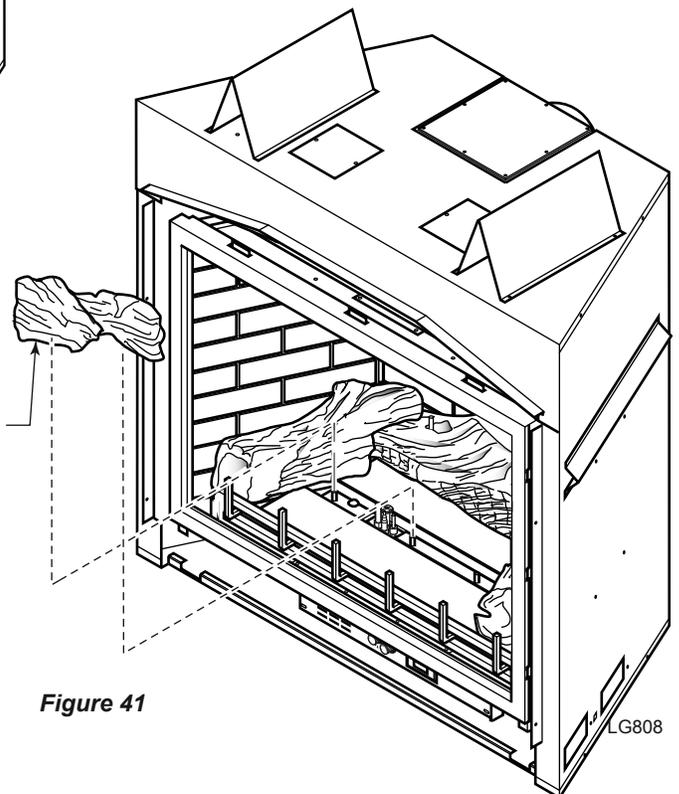


**Figure 41**

- 7. Place right mid log (#7) on two right pins on burner assembly. *Figure 42*

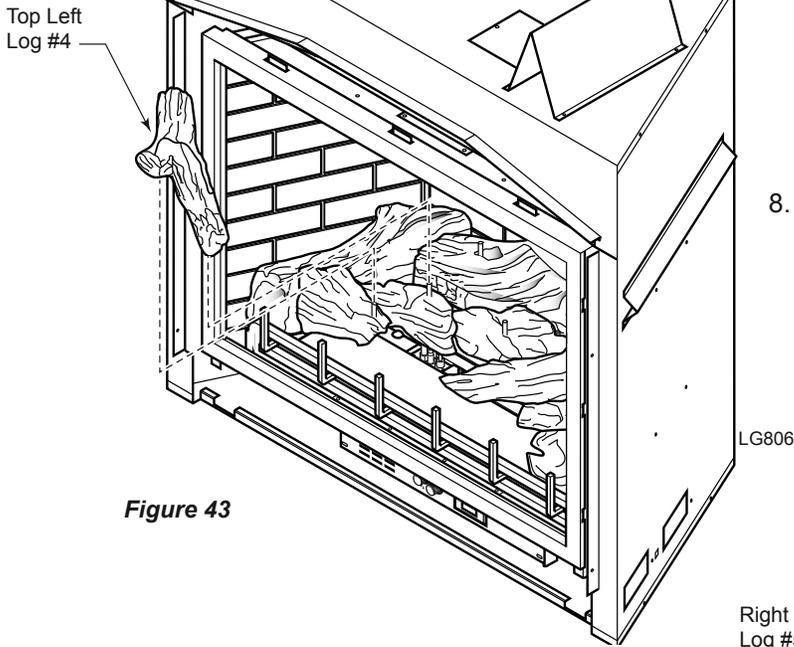
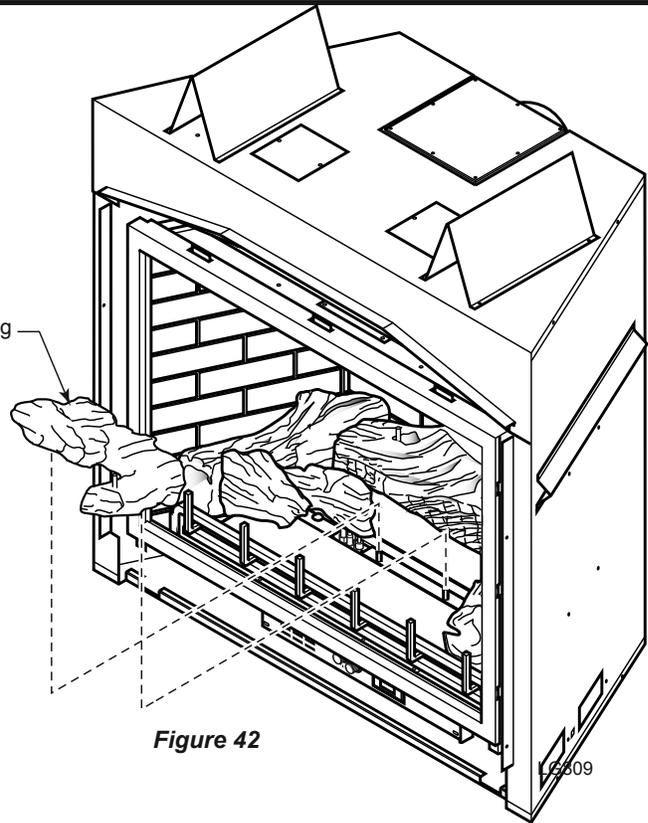


- 8. Place top left log (#4) on two pins on left mid log. *Figure 43*


- 9. Place right top log (#5) on two pins on middle left log. *Figure 44*

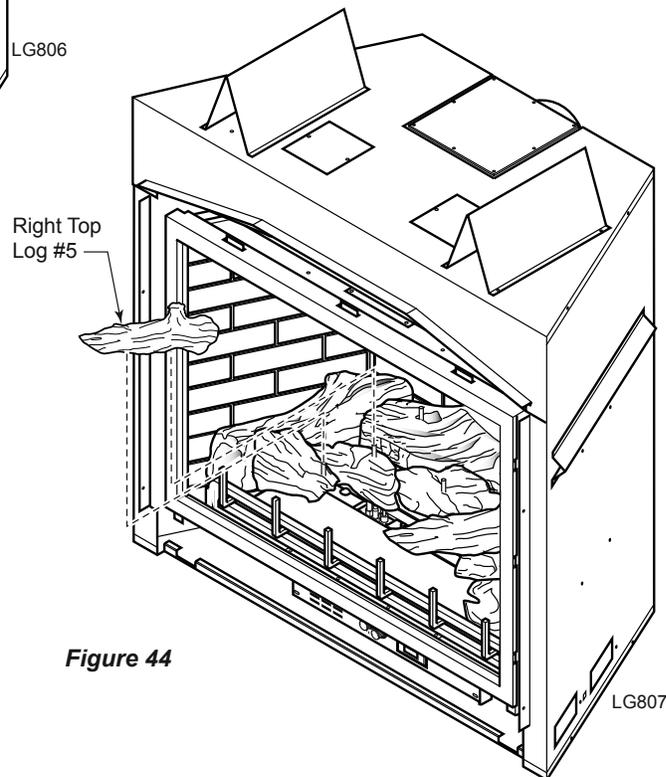

- 10. Place top center log (#8) across rear log (#1) pin and left mid log (#6) pin. *Figure 45*

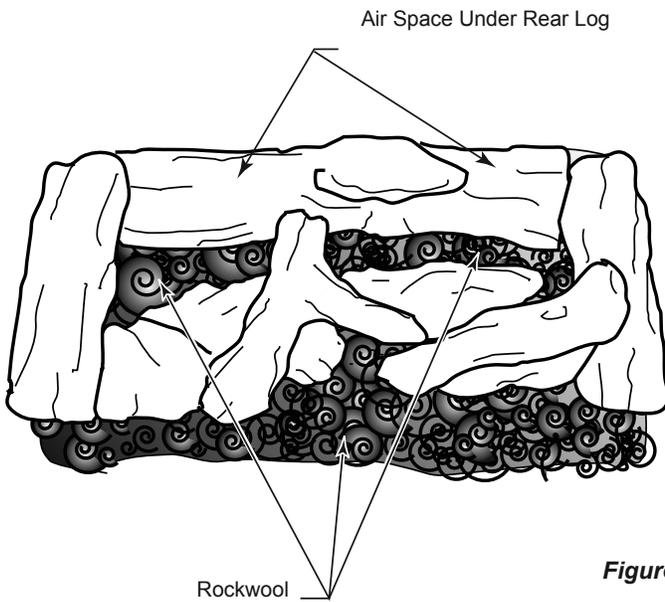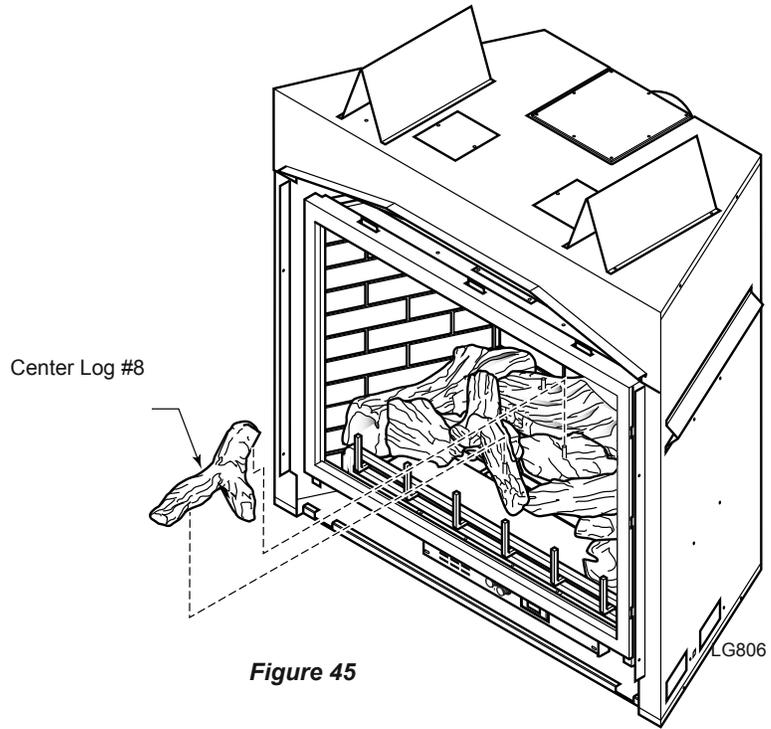

*Figure 46*

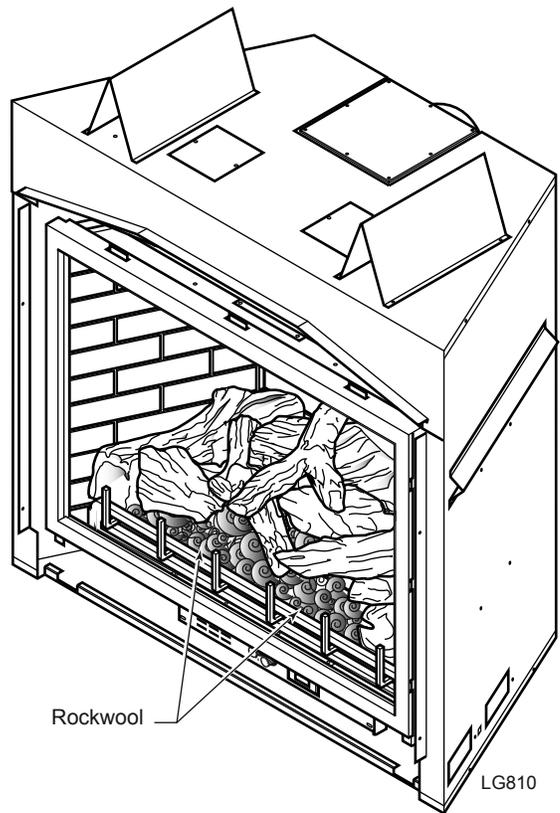

- 11. Break up rock wool (ember material) into dime-sized pieces. Place evenly across both burner surfaces. *Figure 46*. Do not exceed 1/2" depth of coverage. **For best flame and glow, do not block air space between burners and logs with rock wool.**