



1. Distribute one layer of rock wool to cover all round burner ports. Do not cover rectangular slots, located in front and rear. *Figure 64*

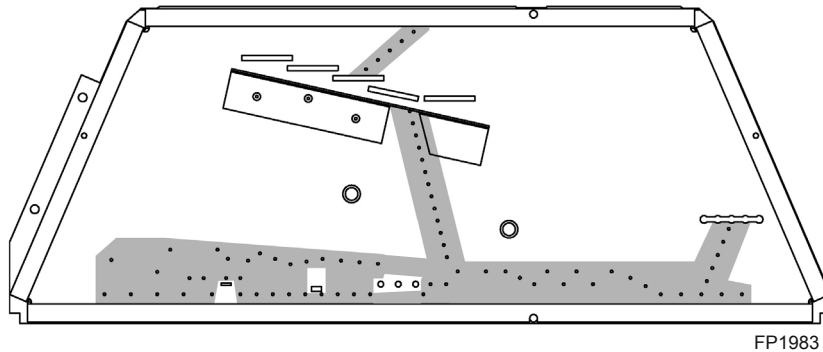

**Figure 64 -
Rock Wool Placement on Burner.**


2. Place log #1 by setting the log over the rear bracket over the two pins. *Figure 65*

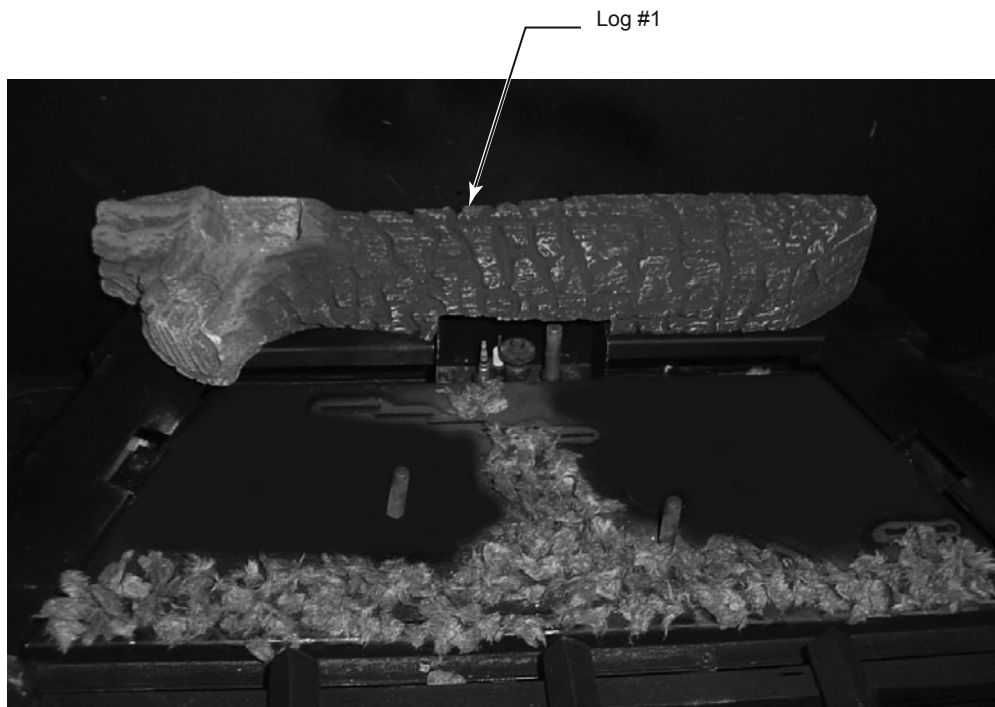

**Figure 65 -
Install log #1**

NOTE: Placing rock wool on burner provides glowing embers. For best results, pull the rock wool apart into pieces the size of a dime or smaller.


WARNING Do not use the entire bag of rock wool to cover the burner. This could cause the flame to burn poorly and may lead to sooting.

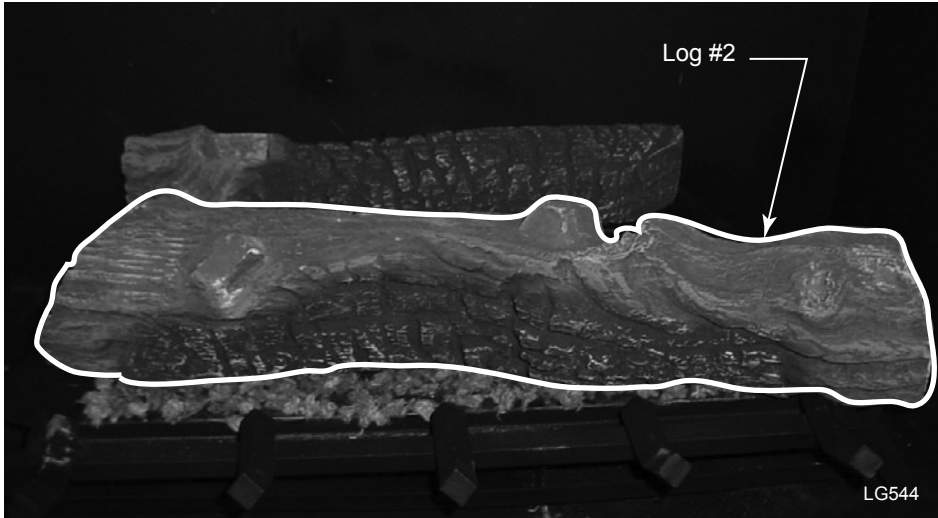


3. Place log #2 at angle across the burner by setting the logs over the two pins located on top of the burner. *Figure 66*

**Figure 66 -
Install Log #2**

4. Place log #3 at an angle over log #2 toward the back by matching the rectangular notch on the bottom of this log with the rectangular protrusion on log #2. Then set the notch located on the bottom of this log toward the back over the metal bracket located to the right side of the burner. *Figure 67*

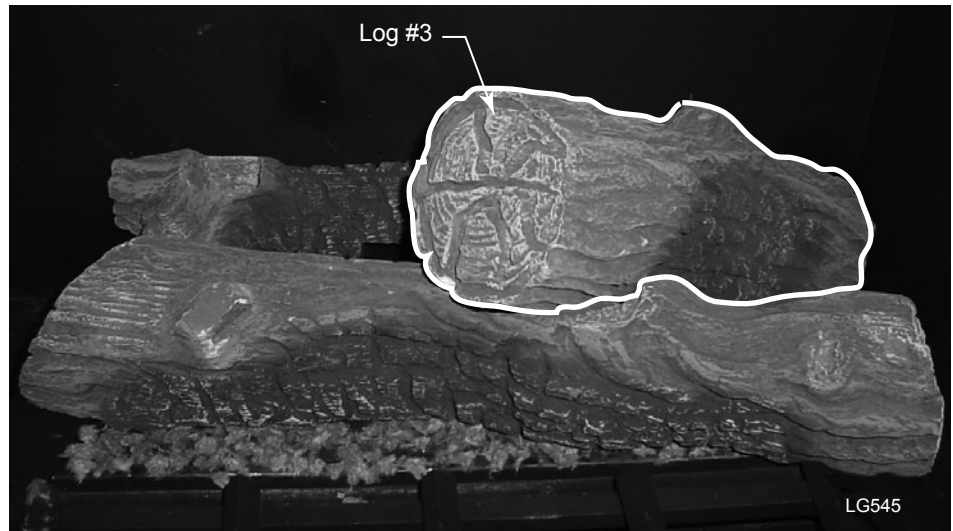

**Figure 67 -
Install log #3**

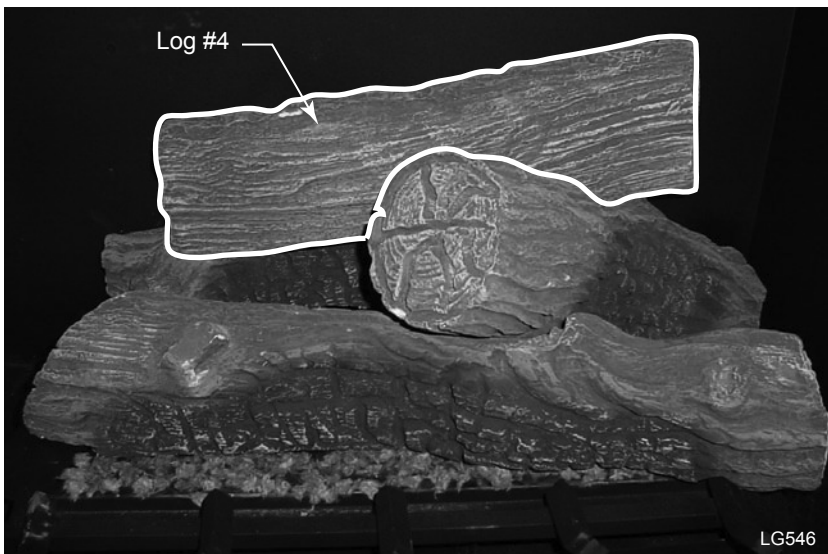

5. Place log #4 by matching the rectangular protrusion on the bottom of this log over the rectangular notch on log #1, then swing the log slightly toward the front and set the log over the notch located on the upper surface of log #3. *Figure 68*


**Figure 68 -
Install log #4**

- 6. Place log #5 by matching the rectangular notch on the bottom of the log with the rectangular protrusion on log #2, then set the notch on the bottom of this log over the very far left tong on the grate. *Figure 69*

Log #5



**Figure 69 -
Install Log #5**

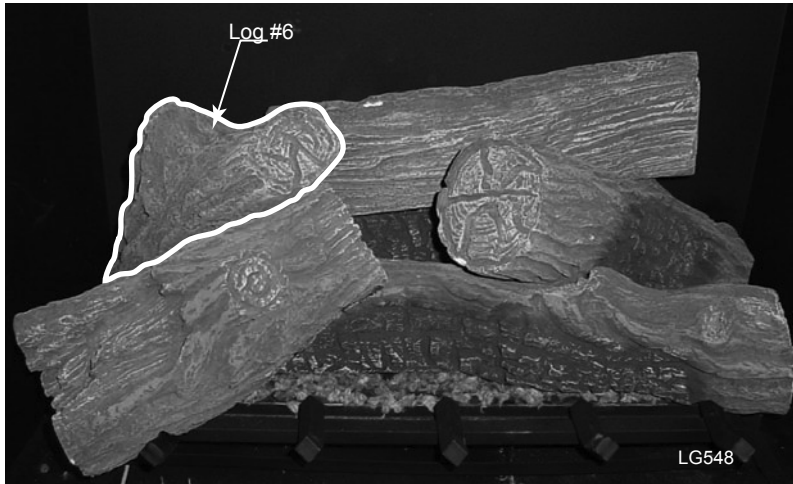

- 7. Place log #6 at an angle over log #5 toward the back by matching the rectangular notch on the bottom of this log with the rectangular protrusion on log #5. Then, set the notch located on the bottom of this log toward the back over the metal bracket located to the left side of the burner. *Figure 70*

**Figure 70 -
Install Log #6**

- 8. Place log #7 between the second and third right tong on the grate as shown in *Figure 71*.



**Figure 71 -
Install log #7**

Log #7